

# Computer-Automated Evolution of an X-Band Antenna for NASA's Space Technology 5 Mission

Gregory S. Hornby<sup>1</sup> Jason D. Lohn<sup>2</sup> Derek S. Linden<sup>3</sup>

*University of California Santa Cruz.<sup>1</sup>  
NASA Ames Research Center, Mail Stop 269-3  
Moffett Field, CA 94035-1000  
hornby@email.arc.nasa.gov*

*Carnegie Mellon University<sup>2</sup>  
NASA Ames Research Center, Mail Stop 23-11  
Moffett Field, CA 94035-1000  
jlohn@email.arc.nasa.gov*

*JEM Engineering<sup>3</sup>  
8683 Cherry Lane  
Laurel, Maryland 20707  
dlinden@jemengineering.com*

---

## Abstract

Whereas the current practice of designing antennas by hand is severely limited because it is both time and labor intensive and requires a significant amount of domain knowledge, evolutionary algorithms can be used to search the design space and automatically find novel antenna designs that are more effective than would otherwise be developed. Here we present our work in using evolutionary algorithms to automatically design an X-band antenna for NASA's Space Technology 5 (ST5) spacecraft. Two evolutionary algorithms were used: the first uses a tree-structured generative representation for constructing the antenna and the second uses a vector of real-valued parameters. The highest-performance antennas from both algorithms were fabricated and tested and both outperformed a hand-designed antenna produced by the antenna contractor for the mission. Subsequent changes to the spacecraft orbit resulted in a change in requirements for the spacecraft antenna. By adjusting our fitness function we were able to rapidly evolve a new set of antennas for this mission in less than a month. One of these new antenna designs was built, tested and approved for deployment on the three ST5 spacecraft, which were successfully launched into space on March 22, 2006. This evolved antenna design is the first computer-evolved antenna to be deployed for any application and is the first computer-evolved hardware in space.

*Key words:* antenna, computational design, evolutionary design, generative representation, spacecraft


---

## 1 Introduction


The current practice of designing and optimizing antennas by hand is limited in its ability to develop new and better antenna designs because it requires significant domain expertise and is both time and labor intensive. As an alternative, researchers have been investigating evolutionary antenna design and optimization since the early 1990s (e.g., [4,7,19,20]), and the field has grown in recent years as computer speed has increased and electromagnetics simulators have improved. Many antenna types have been investigated, including wire antennas [15], antenna arrays [8], and quadrifilar helical antennas [17]. In addition, evolutionary algorithms have been used to evolve antennas *in-situ* [14], that is, taking into account the effects of surrounding structures, which is very difficult for antenna designers to do by hand due to the complexities of electromagnetic interactions. Here we describe two evolutionary algorithm (EA) approaches to a challenging antenna design problem on NASA's Space Technology 5 (ST5) mission [1].

ST5 is one of NASA's New Millennium Program missions to launch multiple miniature spacecraft to test, demonstrate and flight-qualify innovative concepts and technologies in the harsh environment of space for application on future space missions. The ST5 mission consists of three miniaturized satellites, called micro-sats, flying in the test track of Earth's magnetosphere. The micro-sats are approximately 53 cm across and 48 cm high and, when fully fueled, weigh approximately 25 kilograms. Each satellite has two antennas, centered on the top and bottom of each spacecraft. The advantages of flying clusters of multiple spacecraft is that it reduces the risk of an entire mission failing if one system or one instrument fails. Images of the ST5 spacecraft are shown in Figure 1. During flight validation of its technologies, the ST5 spacecraft measured the effects of solar activity on the Earth's magnetosphere over a period of three months.

To produce an antenna for the ST5 mission we used two EAs, each using different representations and different fitness functions, to evolve antenna designs. For the initial mission requirements we selected a suitable class of antennas to evolve, configured our evolutionary design systems for this class, and then evolved a set of antenna designs that met the requirements. However, while these antennas were undergoing flight-qualification testing, the mission's orbital vehicle was changed, putting it into a much lower earth orbit and changing the specifications for the mission. With minimal changes to our evolutionary system, mostly in the fitness function, we were able to evolve new antennas for the revised mission requirements and, within one month of this change, two new antennas were designed and prototyped. One of these newly evolved antennas was approved for deployment on the ST5 mission and a fabricated antenna was used on each of the three ST5 spacecraft that were successfully launched into space on March 22, 2006. The three antennas built from the evolved design are the first computer-evolved antennas to be deployed for any application and the first computer-evolved hardware in space.

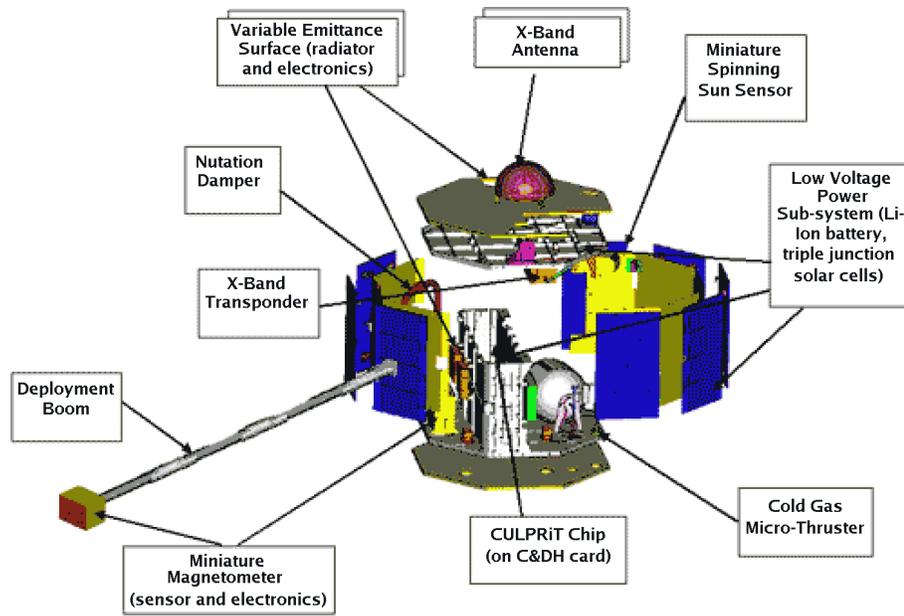

(a)

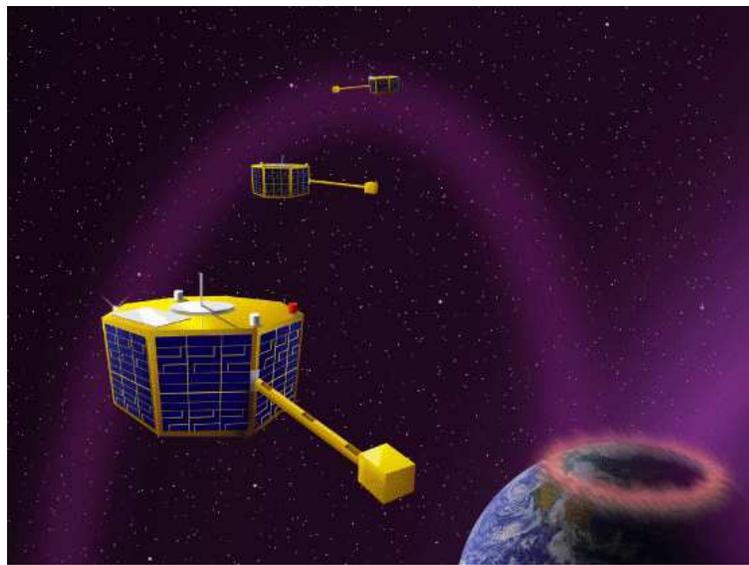

(b)

Fig. 1. Artist's depiction of: (a) the spacecraft model showing the different spacecraft components, and (b) the ST5 mission with the three spacecraft in their string of pearls orbit.

The rest of this paper is organized into two parts as follows. In the first part of this paper the initial ST5 mission requirements are given (in Section 2), followed by descriptions of the two EAs that were used to evolve antennas for these requirements (in Section 3) and then a section on the two best evolved antennas produced by these EAs (in Section 4). In the second part of this paper the revised mission requirements are given along with a description of the revisions that were made to the two EAs (in Section 5), the results of evolving antennas for the revised mission

requirements (in Section 6) and a discussion on the successful launch and operation of NASA’s ST5 mission (in Section 7). Finally, the last section is a summary of this work.

## 2 Initial ST5 Mission Antenna Requirements


Table 1  
Key ST5 Antenna Requirements

Property	Specification
Transmit Frequency	8470 MHz
Receive Frequency	7209.125 MHz
VSWR	< 1.2 : 1 at Transmit Freq < 1.5 : 1 at Receive Freq
Gain Pattern	$\geq 0$ dBic, $40^\circ \leq \theta \leq 80^\circ$ , $0^\circ \leq \phi \leq 360^\circ$
Input Impedance	50 $\Omega$
Diameter	< 15.24 cm
Height	< 15.24 cm
Antenna Mass	< 165 g


The ST5 mission consists of three spacecraft which are orbiting in a “string of pearls” constellation in a highly elliptical, geosynchronous transfer orbit that was originally set at approximately 35,000 km above Earth. A 34 meter, ground-based, dish antenna is used to communicate with these spacecraft, and the initial requirements for the spacecraft’s communication antenna are as follows. The gain pattern must be greater than or equal to 0 dBic (decibels as referenced to an isotropic radiator that is circularly polarized) at  $40^\circ \leq \theta \leq 80^\circ$  and  $0^\circ \leq \phi \leq 360^\circ$  ( $\phi$  is the azimuth and  $\theta$  is the elevation) for right-hand circular polarization (RHCP). The antenna must have a voltage standing wave ratio (VSWR) of under 1.2 at the transmit frequency (8470 MHz) and under 1.5 at the receive frequency (7209.125 MHz). VSWR is a way to quantify reflected-wave interference, and thus the amount of impedance mismatch at the junction, and is the ratio between the highest voltage and the lowest voltage in the signal envelope along a transmission line. At both the transmit and receive frequencies the input impedance should be 50  $\Omega$ . The antenna is restricted in shape to a mass of under 165 g, and must fit in a cylinder of height and diameter of 15.24 cm. These requirements are summarized in Table 1.

The combination of wide beamwidth for a circularly-polarized wave and wide bandwidth make for a challenging design problem. In terms of simulation chal-

lenges, because the diameter of the spacecraft is 53 cm, the spacecraft is 13-15 wavelengths across which makes antenna simulation computationally intensive. Consequently, an infinite ground plane approximation, or smaller finite ground plane, is typically used in modeling and design.

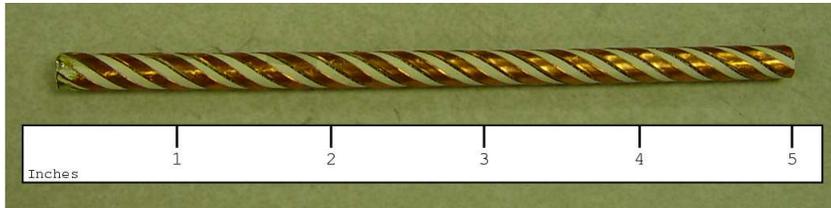

(a)

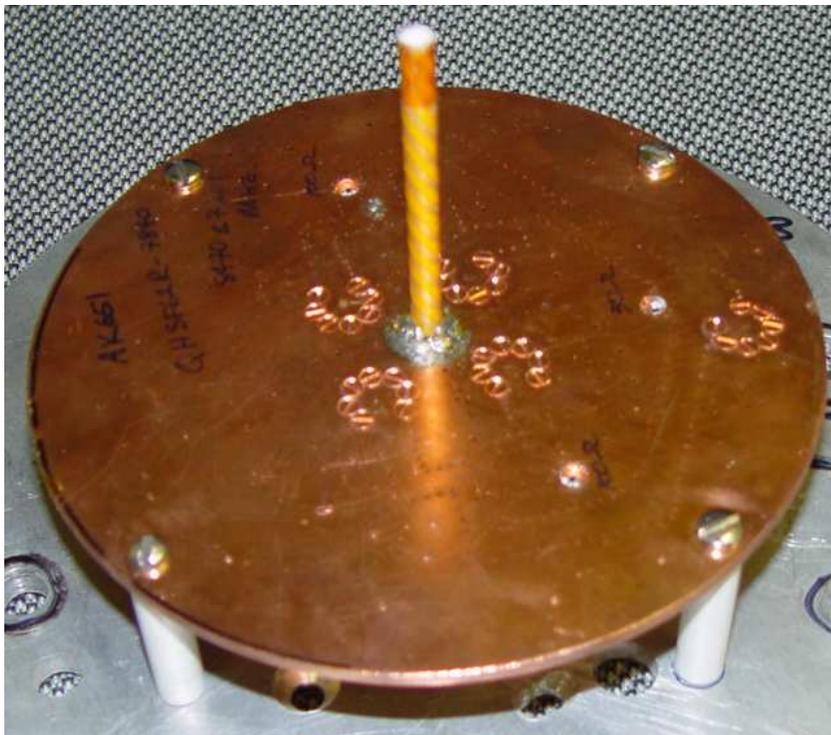

(b)

Fig. 2. Conventionally-designed quadrifilar helical antenna: (a) radiator; and (b) radiator mounted on a ground plane.

In addition to these requirements, an additional “desired” specification was issued for the field pattern. Because of the spacecraft’s relative orientation to the Earth, high gain in the field pattern was desired at low elevation angles. Specifically, across  $0^\circ \leq \phi \leq 360^\circ$ , the desired gain was: 2 dBic for  $\theta = 80^\circ$ , and 4 dBic for  $\theta = 90^\circ$ . ST5 mission managers were willing to accept antenna performance that aligned closer to the “desired” field pattern specifications noted above and the contractor, using conventional design practices, produced a quadrifilar helical antenna (QHA)

(see Figure 2) to meet these specifications.

### 3 Initial Evolutionary Antenna Design Systems

From past experience in designing wire antennas [13], it was decided to constrain our evolutionary design to a monopole wire antenna with four identical arms, with each arm rotated  $90^\circ$  from its neighbors. To produce this type of antennas, the EA evolves genotypes that specify the design for one arm and evaluates these individuals by building a complete antenna using four copies of the evolved arm. Antenna designs were evaluated with the Numerical Electromagnetics Code, Version 4 (NEC-4) [6], for which each antenna simulation took a few seconds of wall-clock time to run and an entire evolutionary run took approximately 6-10 hours on our Beowulf cluster of approximately 100 processors.

Two different evolutionary algorithms were used, since each was developed independently by two of the authors. The first algorithm is based on our previous work evolving rod-structured, robot morphologies [10]. This EA uses an open-ended, generative representation to construct an antenna from a genetic programming (GP) style, tree-structured encoding that allows branching in the wire forms. The second algorithm was used in our previous work in evolutionary antenna design [15] and it is a standard genetic algorithm (GA) that evolves non-branching wire forms using a parameterized representation of an antenna.

To evaluate antenna designs, both EAs used NEC-4, an antenna simulation system written in FORTRAN. NEC-4 computes the impedance of the antenna for the frequencies of interest and, for a user-specified range of points, the total gain and axial ratio. Using standard electromagnetics equations these output values are converted to scores for VSWR and circularly polarized gain [12,21]. Since we had the source code for NEC-4 we were able to link our EAs directly to it.

#### 3.1 *Open-ended EA with a Generative Representation*

The EA in this section allows for branching in the antenna arms by using an open-ended, generative representation. Rather than using a linear sequences of bits or real-values, as is traditionally done, this EA has a tree-structured, generative representation that specifies how to construct an antenna and which naturally represents branching in the antenna arms. The generative representation for encoding branching antennas is an extension of our previous work in using a linear-representation for encoding rod-based robots [9–11]. To build antennas instead of robots, we used the same construction language of building an object out of line segments but used a tree-structured genotype instead of a linear one.

Each node in the tree-structured, generative representation is an antenna-construction operator and an antenna is created by executing the operators at each node in the tree, starting with the root node. In constructing an antenna the current state (location and orientation) is maintained and operators add wires or change the current state. The operators are as follows:

- `forward(length, radius)` - add a wire with the given length and radius extending from the current location and then change the current state location to the end of the new wire.
- `rotate-x(angle)` - change the orientation by rotating it by the specified amount (in radians) about the x-axis.
- `rotate-y(angle)` - change the orientation by rotating it by the specified amount (in radians) about the y-axis.
- `rotate-z(angle)` - change the orientation by rotating it by the specified amount (in radians) about the z-axis.

For evolving an ST5 communications antenna, the radius of the wire segments was fixed at the start of a run, with all wire segments in all antenna designs having the same radius.

An antenna design is created by starting with an initial feedwire and adding wires. The initial feed wire was set to start at the origin with a length of 0.4 cm along the Z-axis. That is, the design starts with the single feedwire from (0.0, 0.0, 0.0) to (0.0, 0.0, 0.4) and the current construction state (location and orientation) for the next wire will be started from location (0.0, 0.0, 0.4) with the orientation along the positive Z-axis. After an antenna is constructed, it is tested to see if there are any intersecting wires and, if so, it is not evaluated but is given the worst possible fitness score so that it will not reproduce.

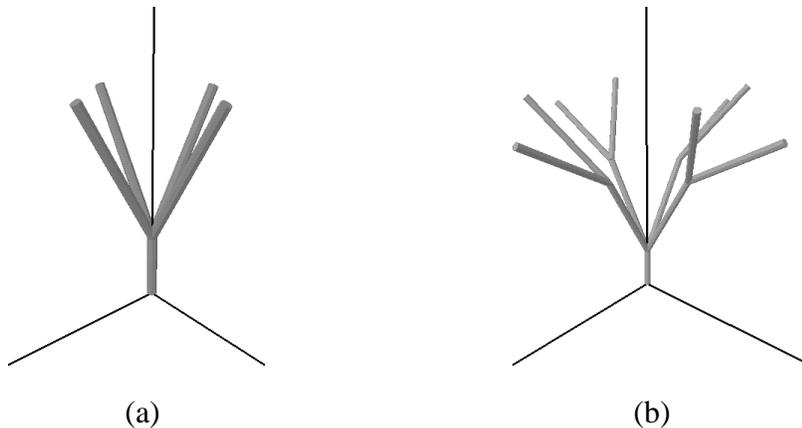


Fig. 3. Example antennas: (a) non-branching arms; (b) branching arms.

To produce antennas that are four-way symmetric about the Z-axis, the construction process is restricted to producing antenna wires that are fully contained in the positive XY quadrant and then, after construction is complete, this arm is copied three times and these copies are placed in each of the other quadrants through rotations

of  $90^\circ/180^\circ/270^\circ$ . For example, in executing the program `rotate-z(0.5236) forward(1.0,0.000406)`, the `rotate-z()` operator causes the current orientation to rotate 0.5236 radians ( $30^\circ$ ) about the Z axis. The `forward()` operator adds a wire of length 1.0 cm and radius 0.000406 cm (which corresponds to a 20 gauge wire) in the current forward direction. This wire is then copied into each of the other three XY quadrants. The resulting antenna is shown in Figure 3(a).

Branches in the representation cause a branch in the flow of execution and create different branches in the constructed antenna. The following is an encoding of an antenna with branching in the arms, here brackets are used to separate the subtrees:  
`rotate-z(0.5236) [ forward(1.0,0.032) [ rotate-z(0.5236)`  
`[ forward(1.0,0.032) ] rotate-x(0.5236) [`  
`forward(1.0,0.032) ] ] ]`  
This antenna is shown in Figure 3(b).

One of the concerns in designing this generative representation for branched antennas was to prevent bloat, elements of the genotype that are not used in constructing the phenotype. If genotypic bloat is possible then, as the population nears a local optima, there is increased selective pressure to produce more and more bloat in individuals and then variation is less and less likely to change the genotype in a way that results in a change of phenotype. This increase of bloat to reduce the effects of variation happens because as the population approaches a local optima most changes in the phenotype tend to produce offspring that have worse fitness than their parent(s). To significantly reduce the amount of bloat in the genotypes the genotypes were constrained so that only wire creation operators may be leaf nodes of the genotype. This property is enforced in the generation of random individuals and also with the variation operators. The advantage of this constraint is that it forces the phenotype to be a product of all nodes in the genotype since all leaf nodes contain operators which create a wire segment in the phenotype and all nodes above the leaf node contain operators which either affect the angle of the wire(s) created from nodes below them in the genotype or create wire segments. Bloat is still possible, such as through branches in which both child sub-trees immediately have a `forward()` operator so that the resulting wire segments overlap, or through rotations which rotate the last wire segment about its axis.

The fitness function for evaluating antennas is a function of the VSWR and gain values on the transmit and receive frequencies. The VSWR component of the fitness function is constructed to put strong pressure toward evolving antennas with receive and transmit VSWR values below the required amounts of 1.2 and 1.5, reduced pressure at a value below these requirements and then no pressure to go below 1.1:

$$v_r = \text{VSWR at receive frequency} \quad (1)$$

$$v'_r = \begin{cases} v_r + 2.0(v_r - 1.25) & \text{if } v_r > 1.25 \\ v_r & \text{if } 1.25 > v_r > 1.1 \\ 1.1 & \text{if } v_r < 1.1 \end{cases} \quad (2)$$

$$v_t = \text{VSWR at transmit frequency} \quad (3)$$

$$v'_t = \begin{cases} v_t + 2.0(v_t - 1.15) & \text{if } v_t > 1.15 \\ v_t & \text{if } 1.15 > v_t > 1.1 \\ 1.1 & \text{if } v_t < 1.1 \end{cases} \quad (4)$$

$$vswr = v'_r v'_t \quad (5)$$

In the above equations the constant values of 1.15 and 1.25 were used since they are just below the target values.

The gain component of the fitness function takes the gain (in dBic) in  $5^\circ$  increments about the angles of interest: from  $40^\circ \leq \theta \leq 90^\circ$  and  $0^\circ \leq \phi \leq 360^\circ$ :

$$gain_{ij} = \text{gain at } \theta = 5^\circ i, \phi = 5^\circ j \quad (6)$$

$$gain(i, j) = \begin{cases} 0 & \text{if } gain_{ij} > 0.5 \\ 0.5 - gain_{ij} & \text{if } gain_{ij} < 0.5 \end{cases} \quad (7)$$

$$gain = 1 + 0.1 \sum_{i=8}^{i<19} \sum_{j=0}^{j=72} gain(i, j) \quad (8)$$

While the actual minimum required gain value is 0 dBic for  $40^\circ \leq \theta \leq 80^\circ$ , and the desired gain values are at least 2 dBic for  $80^\circ \leq \theta < 90^\circ$  and at least 4 dBic for  $\theta = 90^\circ$ , only a single target gain of 0.5 dBic is used here. This target value provides some headroom to account for errors in simulation over the minimum of 0 dBic and does not attempt to meet the desired gain values. Since achieving gain values greater than 0 dBic is the main part of the required specifications, the third component of the fitness function rewards antenna designs for having sample points with gains greater than zero:

$$outlier(i, j) = \begin{cases} 0.1 & \text{if } gain_{ij} < 0.01 \\ 0 & \text{otherwise} \end{cases} \quad (9)$$

$$outlier = 1 + \sum_{i=8}^{i<19} \sum_{j=0}^{j=72} outlier(i, j) \quad (10)$$

These three components are multiplied together to produce the overall fitness score

of an antenna design:

$$F = vswr \times gain \times outlier \quad (11)$$

The objective of the EA is to produce antenna designs that minimize  $F$ .

To take into account imprecision in manufacturing an antenna, antenna designs are evaluated multiple times, each time with a small random perturbation applied to joint angles and wire radii. The overall fitness of an antenna is the worst score of these evaluations. In this way, the fitness score assigned to an antenna design is a conservative estimate of how well it will perform if it were to be constructed. An additional side-effect of this is that antennas evolved with this manufacturing noise tend to perform well across a broader range of frequencies than do antennas evolved without this manufacturing noise.

### 3.2 Parameterized EA

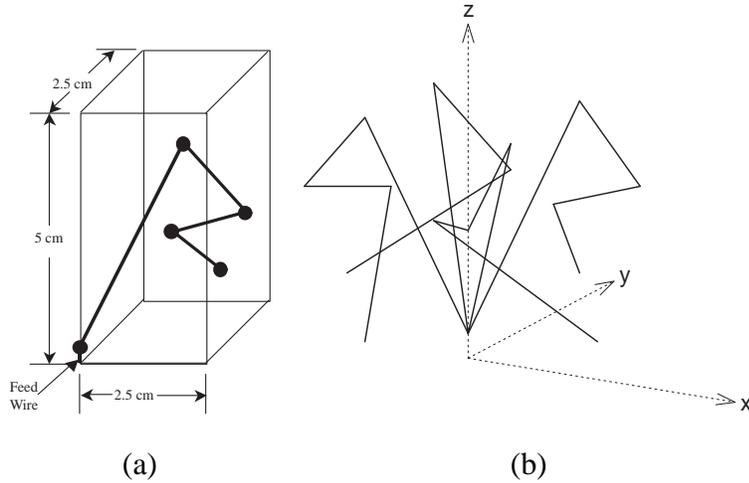


Fig. 4. (a) Size constraints and evolved arm; (b) resulting 4-wire antenna after rotations.

With the parameterized EA the design space was constrained to non-branching arms using a real-valued representation. This real-valued, parameterized representation consists of a fixed-length vector of triplets that specify the X, Y and Z locations of segment end-points. Based on some trial runs, we settled on 6 segments (which works out to 18 parameters) and constrained the points to be in a  $2\text{cm} \times 2\text{cm} \times 2\text{cm}$  box. Since a linear vector of X, Y, and Z coordinates is used, this limits antenna designs to non-branching antennas.

Quadratic crossover [2] with Gaussian mutation is used to evolve effective designs from initial random populations and this EA has been shown to work extremely well on many different antenna problems [3,5,16]. An example of an evolved arm, along with the size constraints, is shown in Figure 4(a) and the resulting antenna

with four arms is shown in Figure 4(b). The feed wire for the antenna is not optimized, but is specified by the user.

This EA used pattern quality (PQ) scores at 7.2 GHz and 8.47 GHz in the fitness function. Unlike the other EA, VSWR was not used in this fitness calculation. To quantify the pattern quality at a single frequency,  $PQ_f$ , the following algorithm was used:

$$PQ_f = \sum_{\substack{0^\circ < \phi < 360^\circ \\ 40^\circ < \theta < 80^\circ}} (\text{gain}_{\phi,\theta} - T)^2 \quad \text{if } \text{gain}_{\phi,\theta} < T \quad (12)$$

where  $\text{gain}_{\phi,\theta}$  is the gain of the antenna in dBic (right-hand polarization) at a particular angle,  $T$  is the target gain (3 dBic was used in this case),  $\phi$  is the azimuth, and  $\theta$  is the elevation.

To compute the overall fitness of an antenna design, the pattern quality measures at the transmit and receive frequencies were summed, lower values corresponding to better antennas:

$$F = PQ_{7.2} + PQ_{8.47} \quad (13)$$

## 4 Evolved Antenna Results

To evolve antennas for the ST5 mission the two EAs described in the previous section used different configurations. With the open-ended EA, a population size of two hundred individuals was evolved with a generational EA. For this EA, new individuals were created with an equal probability of using mutation or recombination, with parents selected using remainder stochastic sampling and rank-based exponential scaling [18]. With the parameterized EA, a population of fifty individuals was maintained, of which 50% were kept from generation to generation. The mutation rate was 1%, with a Gaussian mutation standard deviation of 10% of the value range. This EA was halted after one hundred generations had been completed, the EA's best score was stagnant for forty generations, or the EA's average score was stagnant for ten generations. This method for halting the EA was used because, based on previous experience, there is a very low probability that anything significant will be produced and, even if something slightly more fit is evolved, this difference is not likely to be noticeable when it comes to comparing fabricated designs.

As stated earlier, the ST5 spacecraft is 13-15 wavelengths wide, which makes simulation of the antenna on the full craft very computationally intensive. To keep

the antenna evaluations fast, an infinite ground plane approximation was used in all runs. This was found to provide sufficient accuracy to achieve several good designs. Designs were then analyzed on a finite ground plane of the same shape and size as the top of the ST5 body to determine their effectiveness at meeting requirements in a realistic environment.


Dozens of experimental runs were performed with each EA and the two best evolved antenna designs, one from each of the EAs described above, were fabricated and tested. The antenna named ST5-3-10 was produced by the open-ended EA that allowed branching, and the antenna named ST5-4W-03 was produced by the parameterized EA that did not allow for branching. Photographs of both prototyped antennas are shown in Figure 5.

The gain patterns for the two evolved antennas are shown in Figures 6 and 7 and the gain patterns for the traditionally designed QHA are shown in Figure 8. Data for these plots was taken from actual antennas that were tested in an anechoic chamber. Evolved antenna ST5-3-10 is 100% compliant with the original mission antenna performance requirements and this was confirmed by testing a prototype antenna in an anechoic test chamber at NASA Goddard Space Flight Center. The genotype of antenna ST5-3-10 is given in Appendix A.


In comparing the performance of ST5-3-10 with the QHA, note that with ST5-3-10 the minimum gain falls off steeply below  $20^\circ$ . This is acceptable as those elevations were not required due to the orientation of the spacecraft with respect to Earth. In contrast, the QHA was optimized at the 8.47 GHz frequency to achieve high gain in the vicinity of  $75^\circ - 90^\circ$ . While the QHA does not strictly meet the field pattern requirements, it achieves high performance and was acceptable to the mission managers.

## **5 Revised Evolutionary Antenna Design Systems**

While the original two antenna, ST5-3-10 and ST5-4W-03, were undergoing space-qualification testing, the launch vehicle for the ST5 spacecraft was changed, resulting in a new, lower orbit. This new orbit is a highly elliptical, Sun synchronous orbit ranging from 300 km to approximately 4,500 km above the Earth and it necessitated the addition of a new requirement on the gain pattern of  $\geq -5$  dBic from  $0^\circ$  to  $40^\circ$  from zenith. The complete set of revised requirements for the antennas on the ST5 Mission are summarized in Table 2.

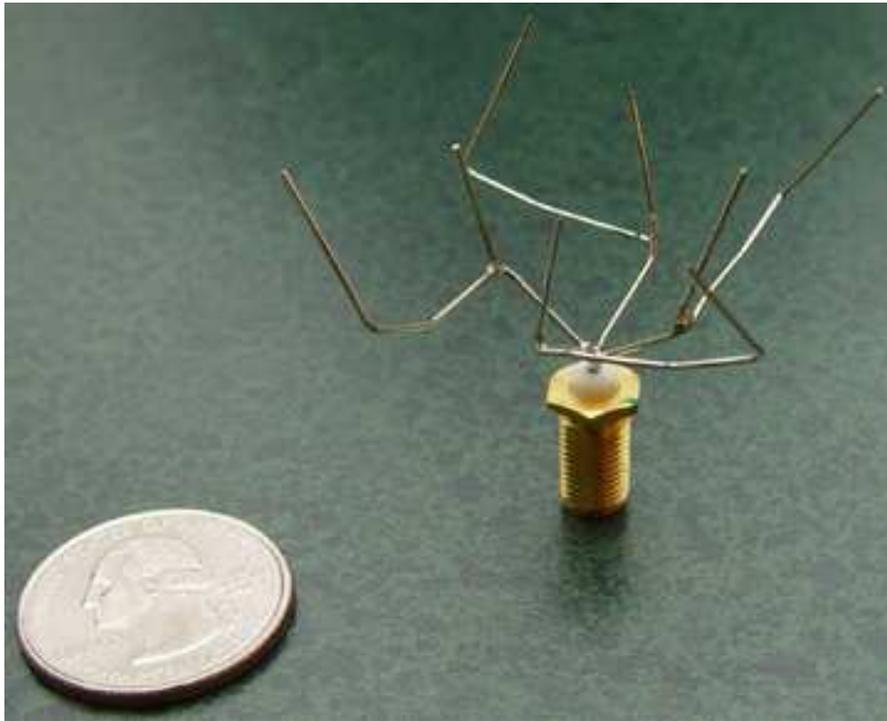


(a)

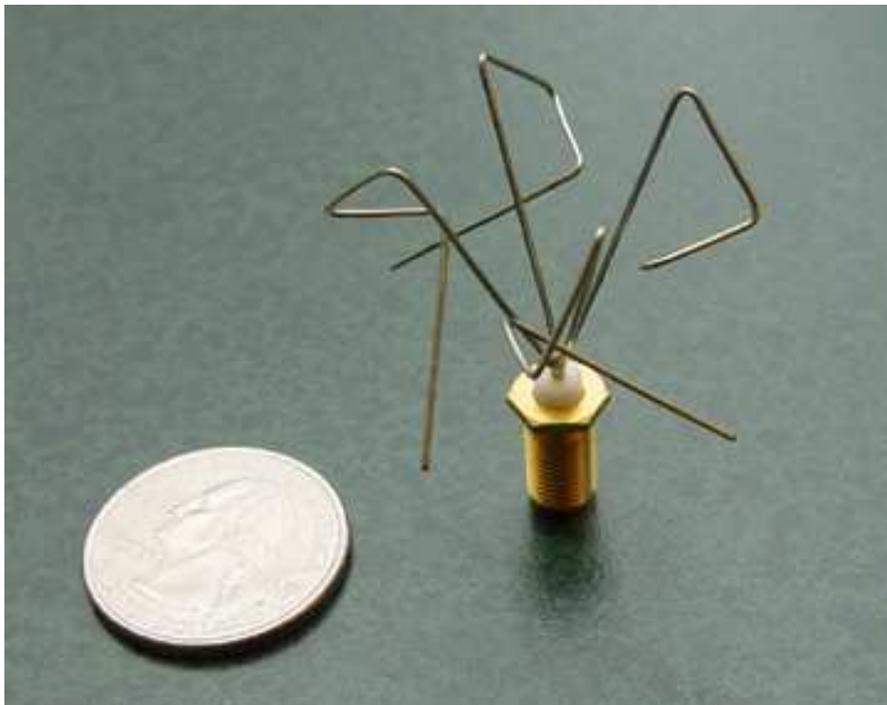


(b)

Fig. 5. Photographs of prototype evolved antennas: (a) ST5-3-10; (b) ST5-4W-03

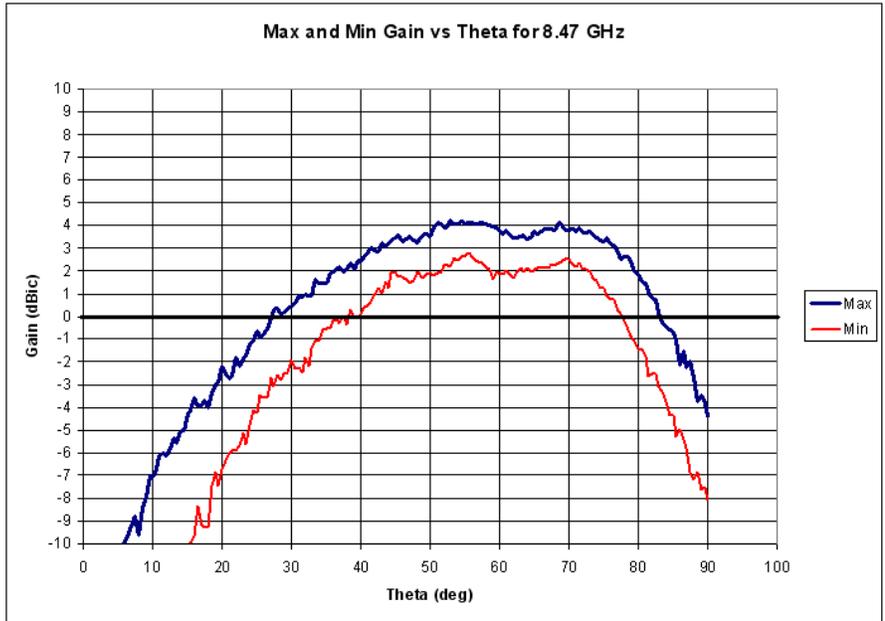


(a)

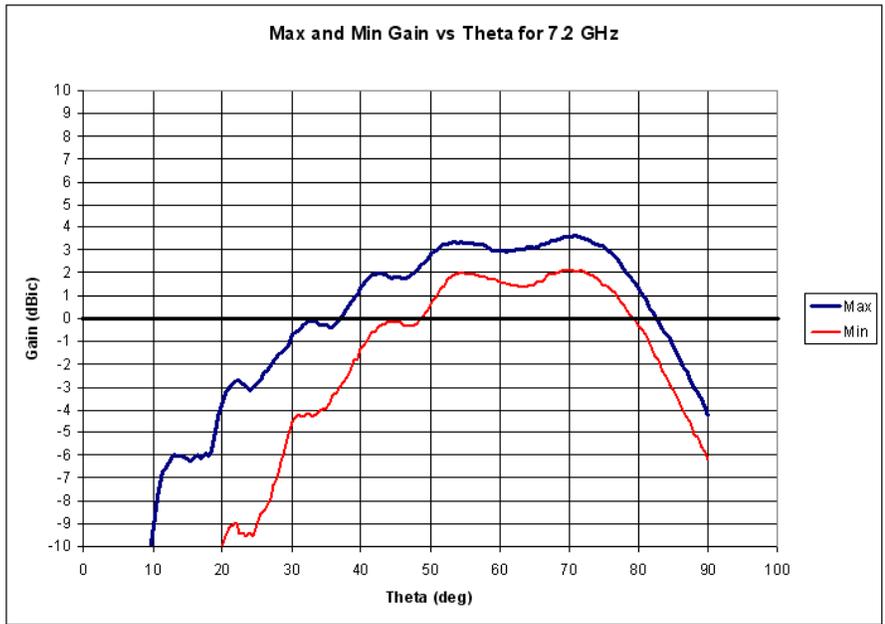


(b)

Fig. 6. Maximum and minimum gain for antenna ST5-4W-03, as measured in an anechoic test chamber at NASA Goddard Space Flight Center, at: (a) 8.47 GHz; and (b) 7.2GHz. This antenna was evolved with the parameterized EA.

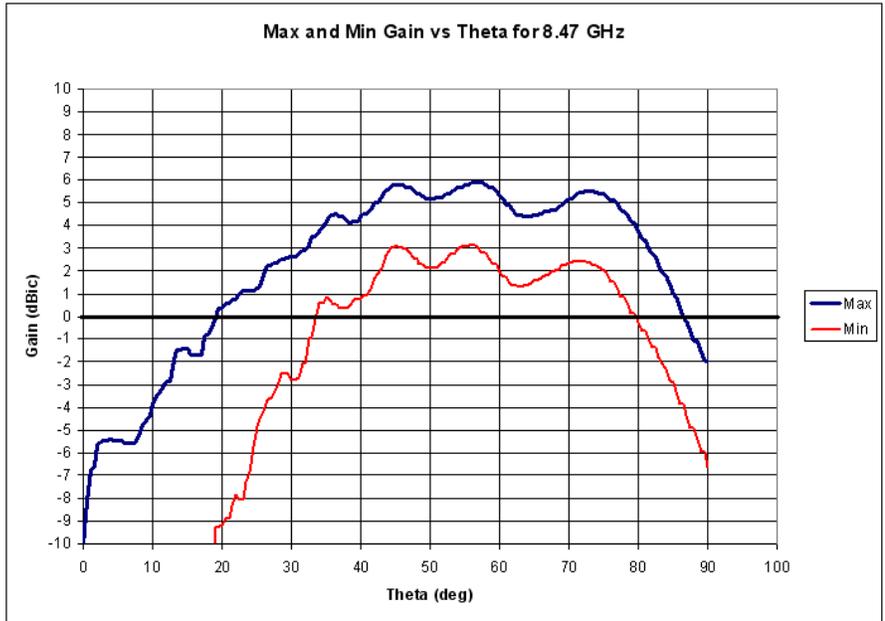


(a)

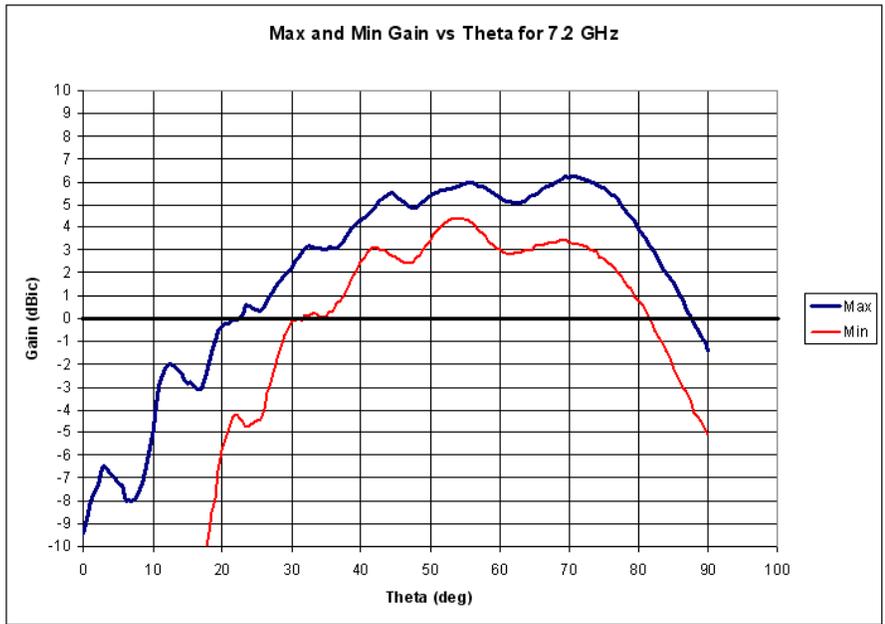


(b)

Fig. 7. Maximum and minimum gain for antenna ST5-3-10, as measured in an anechoic test chamber at NASA Goddard Space Flight Center, at: (a) 8.47 GHz; and (b) 7.2GHz. This antenna was evolved with the open-ended EA which allowed branching.

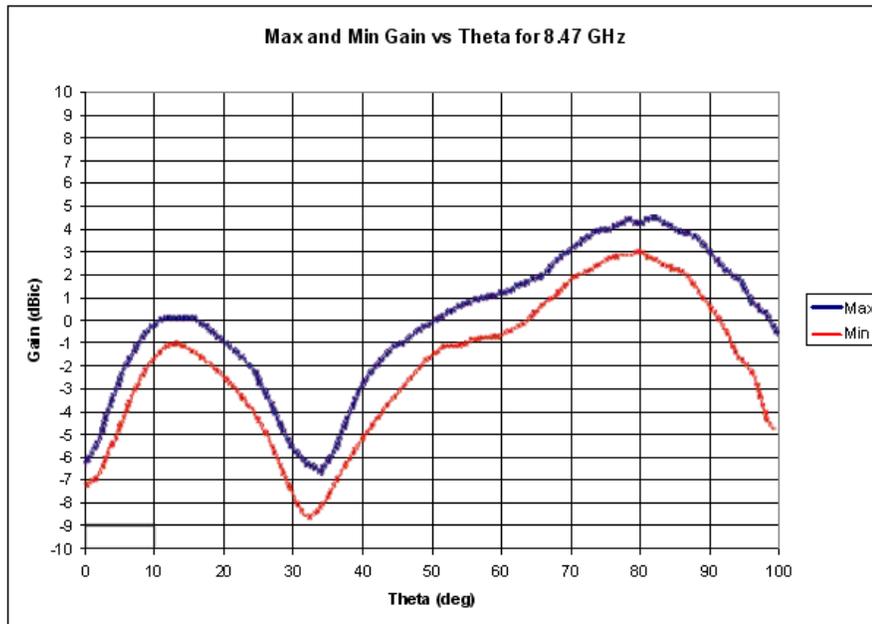

(a)

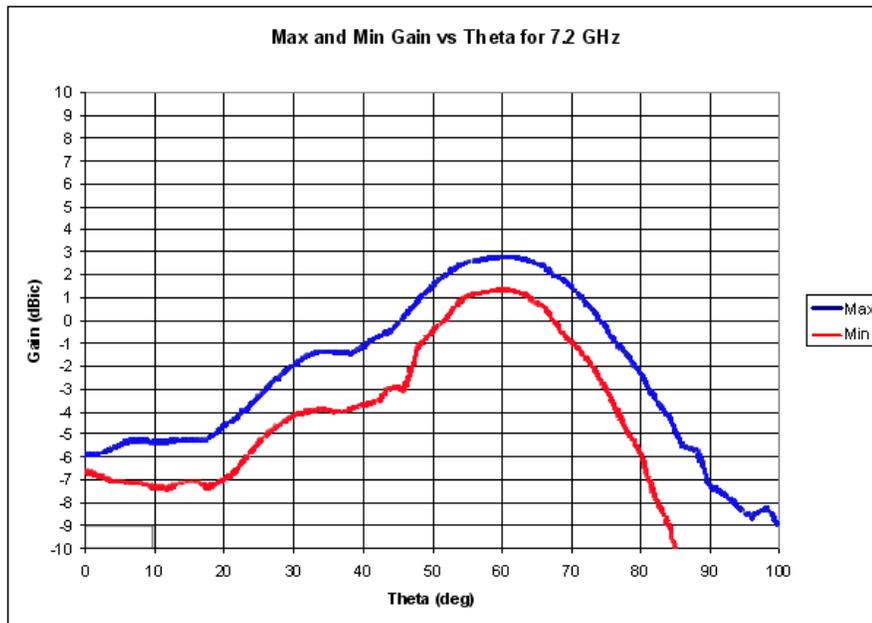

(b)

Fig. 8. Maximum and minimum gain for the traditionally designed QHA at: (a) 8.47 GHz; and (b) 7.2GHz.

Table 2  
Key ST5 Antenna Requirements

Property	Specification
Transmit Frequency	8470 MHz
Receive Frequency	7209.125 MHz
VSWR	< 1.2 : 1 at Transmit Freq < 1.5 : 1 at Receive Freq
Original Gain Pattern	$\geq 0$ dBic, $40^\circ \leq \theta \leq 80^\circ$ , $0^\circ \leq \phi \leq 360^\circ$
Additional Gain Pattern Requirement	$\geq -5$ dBic, $0^\circ \leq \theta \leq 40^\circ$ , $0^\circ \leq \phi \leq 360^\circ$
Input Impedance	50 $\Omega$
Diameter	< 15.24 cm
Height	< 15.24 cm
Antenna Mass	< 165 g

### 5.1 Revised Design Space

As a result of the new mission requirements, we needed to modify both the type of antenna being evolved and the fitness function. The original antennas evolved for the ST5 mission were constrained to monopole wire antennas with four identical arms, with each arm rotated  $90^\circ$  from its neighbors. With these antennas the EA evolved genotypes that specified the design for one arm and the phenotype consisted of four copies of the evolved arm. Because of symmetry, this four-arm design has a null at zenith that is built into the design and is unacceptable for the revised mission. To achieve an antenna that meets the new mission requirements, we decided to search the space of single-arm antennas. In addition, because of our concerns in meeting space-qualification standards in the joints of a branching antenna, we constrained our antenna designs to non-branching ones. Producing a single-arm antenna to meet the mission requirements is a very challenging problem since the satellite is spinning at roughly 40 RPM and it is important that the antennas have uniform gain patterns in the azimuth. This criteria is difficult to meet with a single-arm antenna, because it is inherently asymmetric. In the remainder of this section we describe how we modified our two evolutionary algorithms to address these new requirements.

### 5.2 Revised Open-Ended EA

Modifying the open-ended EA consisted of restricting the representation so as to only produce non-branching antennas and modifying the fitness function to address

the new requirements. To restrict antennas to be non-branching the `forward()` operator was changed to only allow for a single child node. The original fitness function with the open-ended EA was a product of a VSWR component, a gain-error component and a gain-outlier component. For the revised fitness function the VSWR component was kept the same and the gain-error component was changed to include the elevation angles of  $0^\circ \leq \theta < 40^\circ$  and made more flexible. In addition the outlier component was dropped, since it was somewhat redundant with the gain-error component but with less of a gradient, and it was replaced with a smoothness component.

Whereas the original gain component of the fitness function had the same weighting and target gain value for each elevation angle, the revised gain component allows for a different target gain and weight for each elevation:

```
gain_penalty (i, j):
    gain = calculated gain at  $\theta = 5^\circ i, \phi = 5^\circ j$ ;
    if (gain  $\geq$  target[i]) {
        penalty := 0.0;
    } else if ((target[i] > gain) and (gain  $\geq$  outlier[i])) {
        penalty := (target[i] - gain);
    } else { /* outlier[i] > gain */
        penalty := (target[i]-outlier[i]) + 3.0 * (outlier[i] - gain));
    }
    return penalty * weight[i];
```

Target gain values at a given elevation are stored in the array `target[]` and are 2.0 dBic for  $i$  equal from 0 to 16 and are -3.0 dBic for  $i$  equal to 17 and 18. Outlier gain values for each elevation are stored in the array `outlier[]` and are 0.0 dBic for  $i$  equal from 0 to 16 and are -5.0 dBic for  $i$  equal to 17 and 18. Each gain penalty is scaled by values scored in the array `weight[]`. For the low band the values of `weight[]` are 0.1 for  $i$  equal to 0 through 7; values 1.0 for  $i$  equal to 8 through 16; and 0.05 for  $i$  equal to 17 and 18. For the high band the values of `weight[]` are 0.4 for  $i$  equal to 0 through 7; values 3.0 for  $i$  equal to 8 through 12; 3.5 for  $i$  equal to 13; 4.0 for  $i$  equal to 14; 3.5 for  $i$  equal to 15; 3.0 for  $i$  equal to 16; and 0.2 for  $i$  equal to 17 and 18. The final gain component of the fitness score of an antenna is the sum of gain penalties for all angles. For this component of the fitness function, numerical values were selected based on performing numerous evolutionary runs and tweaking the values to try to improve evolutionary results.

To put evolutionary pressure on producing antennas with smooth gain-patterns around each elevation, the third component in scoring an antenna is based on the standard deviation of gain values. This score is a weighted sum of the standard deviation of the gain values for each elevation  $\theta$ . The weight value for a given elevation is the same as is used in calculating the gain penalty. As described in the

following section, the addition of this component to the fitness function resulted in the evolution of antennas that had noticeably smoother patterns.

These three components are multiplied together to produce the overall fitness score of an antenna design, which is to be minimized:

$$F = vswr \times gain \times standard\ deviation \quad (14)$$

### 5.3 Revised Parameterized EA


With the parameterized EA, modifying it to produce antennas for the new mission requirements consisted of changing the fitness function to check angles  $0^\circ \leq \theta < 40^\circ$  in addition to the original range of  $40^\circ \leq \theta \leq 80^\circ$ . Then, since the vector of parameters no longer specifies an arm in the positive XY quadrant that is copied into the other quadrants, the constraints on the coordinates in the genotype were modified to allow for points in all four of the XY quadrants.

## 6 Re-evolved Antenna Results


In total, it took us approximately four weeks to both modify our two EAs and evolve new antennas for the revised mission requirements. The configuration of the two EAs (population size, selection/replacement, variation, etc.) remained the same as in the first set of evolutionary runs. Again, the best antennas evolved by the two EAs were then evaluated by hand on a second antenna simulation package, WIPL-D, with the addition of a 6" ground plane to determine which designs to fabricate and test on the ST5 mock-up. Based on these simulations the best antenna design from each EA was selected for fabrication, and these are shown in Figure 9: ST5-33.142.7 was evolved using the open-ended EA (Figure 9(a)) and ST5-104.33 was evolved using the parameterized EA (Figure 9(b)). A sequence of evolved antennas that produced antenna ST5-33.142.7 is shown in Figure 10.

Both ST5-33.142.7 and ST5-104.33 have excellent simulated RHCP patterns for the transmit frequency, as shown in Figure 11. The antennas also have good circular polarization purity across a wide range of angles, as shown in Figure 12 for ST5-104.33. To the best of our knowledge, this performance quality has never been seen before in this form of antenna.

Since there are two antennas on each spacecraft, and not just one, it is important to measure the overall gain pattern with two antennas mounted on the spacecraft. For this, different combinations of the two evolved antennas and the QHA were tried on the the ST5 mock-up and measured in an anechoic chamber (Figure 13). With two

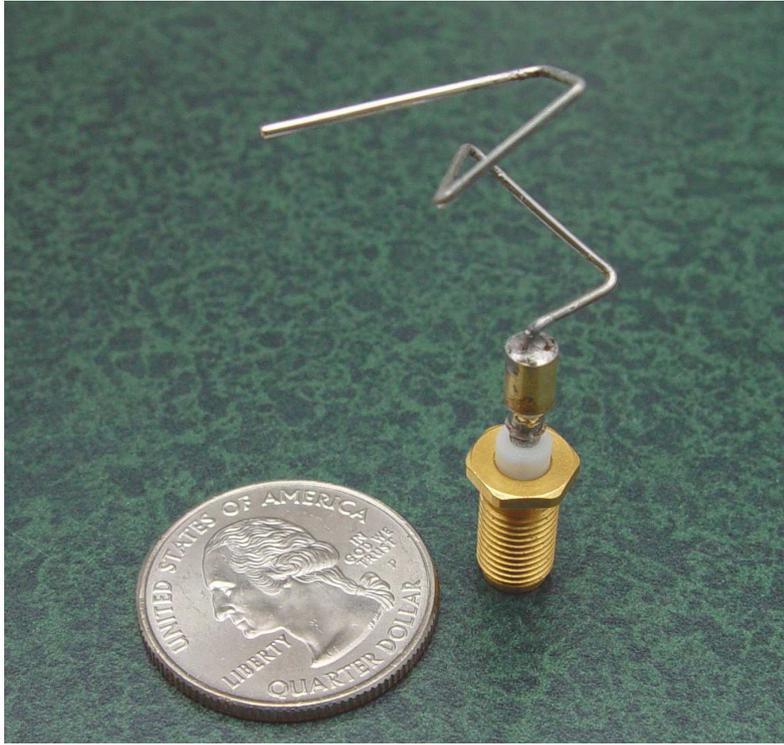

(a)

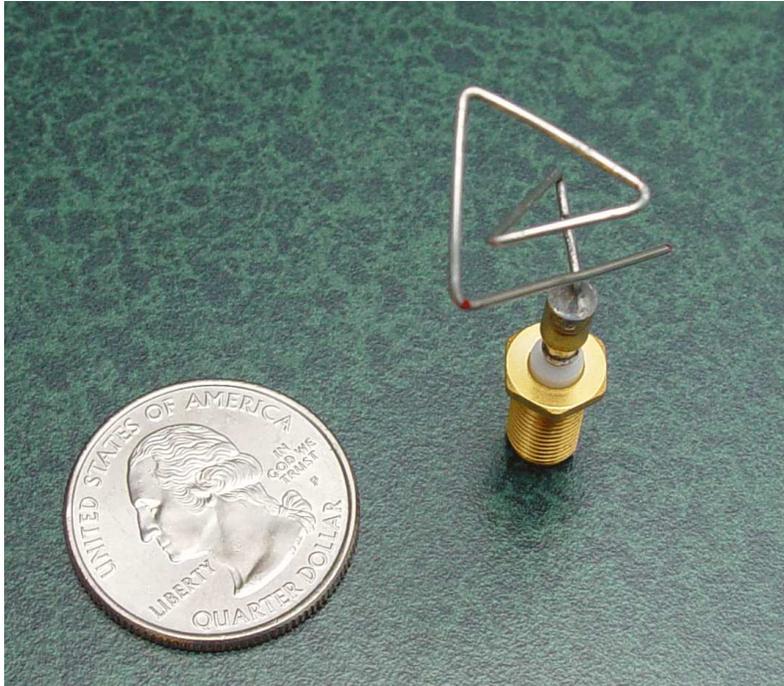

(b)

Fig. 9. Evolved antenna designs: (a) evolved using a constructive process, named ST5-33.142.7; and (b) evolved using a vector of parameters, named ST5-104.33.

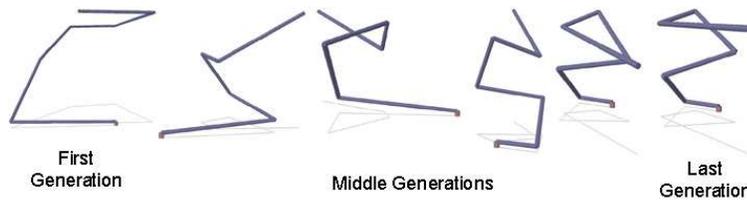



Fig. 10. Sequence of evolved antennas leading up to antenna ST5-33.142.7.

QHAs 38% efficiency was achieved, using a QHA with an evolved antenna resulted in 80% efficiency, and using two evolved antennas resulted in 93% efficiency. Here “efficiency” means how much power is being radiated versus how much power is being eaten up in resistance, with greater efficiency resulting in a stronger signal and greater range. Figure 14 shows these measured results for the combination of two QHAs together (left graph), a QHA on the left and an ST5-33.142.7 on the right (middle graph), and for two ST5-33.142.7 antennas (right graph). These three graphs show that the evolved antenna ST5-33.142.7 achieves considerably better gain than the QHA for angles  $30^\circ$  above the horizon and higher.

## 7 First Computer-Evolved Hardware in Space


Of the two evolved antennas that were evolved to meet the revised ST5 mission specifications, antenna ST5-33.142.7 was approved for deployment and the first set of ST5-33.142.7 flight units were delivered to Goddard Space Flight Center (GSFC) on February 25, 2005 (Figure 15) to undergo environmental tests. The three images in Figure 15(a) are different photos of one of the flight antennas sent to Goddard Space Flight Center: the evolved wire configuration for the radiator sits on top of a 6” diameter ground plane and is encased inside an uncoated radome. The image in Figure 15(b) shows a flight antenna after the radome has been coated with a black paint to differentiate it from the QHAs and the image in Figure 15(c) shows the underside of a flight antenna with the connector, gold-plated ground plane and the tuning assembly. On April 8, 2005 the last test was completed and passed, a thermal-vacuum testing in which the antenna performed above requirements during one survival cycle ( $-80^\circ\text{C}$  to  $+80^\circ\text{C}$ ) and through each of eight qualification cycles ( $-70^\circ\text{C}$  to  $+50^\circ\text{C}$ ).

Having passed all tests, antenna ST5-33.142.7 was used as one of the communication antennas on each of the ST5 spacecraft. The image in Figure 16(a) shows the three ST5 Spacecraft in the NASA Goddard Spaceflight Center clean room, with the black radome on top of each spacecraft containing an evolved antenna, ST5-33.142.7 and the white radome on the bottom of the spacecraft containing a quadri-filar helical antenna. This image also shows the boom holding the magnetometer, the instrument for measuring the magnetosphere. In preparation for launch, the

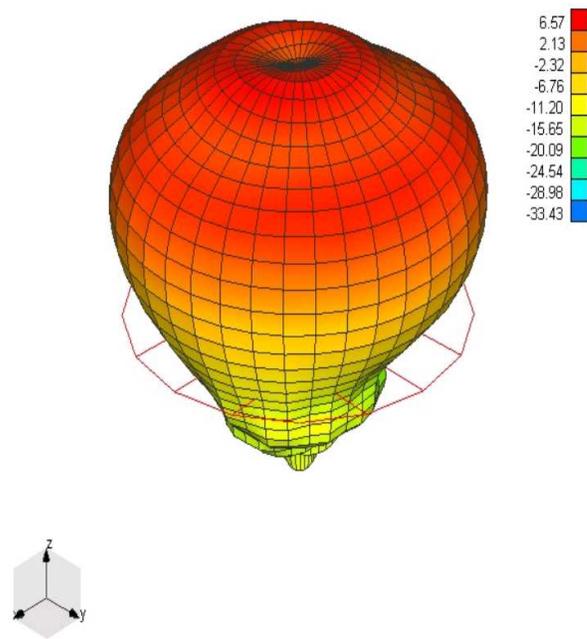

(a)

Eric-Gain [dB] 8.47GHz

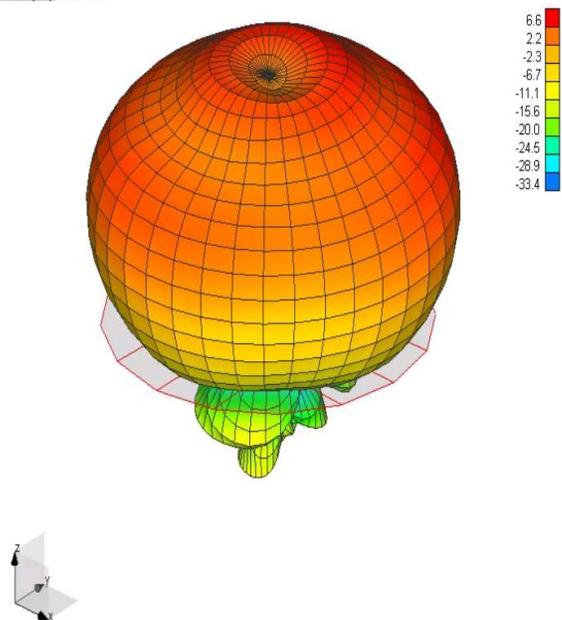

(b)

Fig. 11. Simulated 3D patterns for: (a) ST5-33.142.7; and (b) ST5-104.33 on a 6'' ground plane at 8470 MHz for RHCP polarization. Simulation is performed by WIPL-D, high gain is indicated with warmer colors (red) and low gain is indicated with cooler colors (blue). The patterns are similar for 7209 MHz.

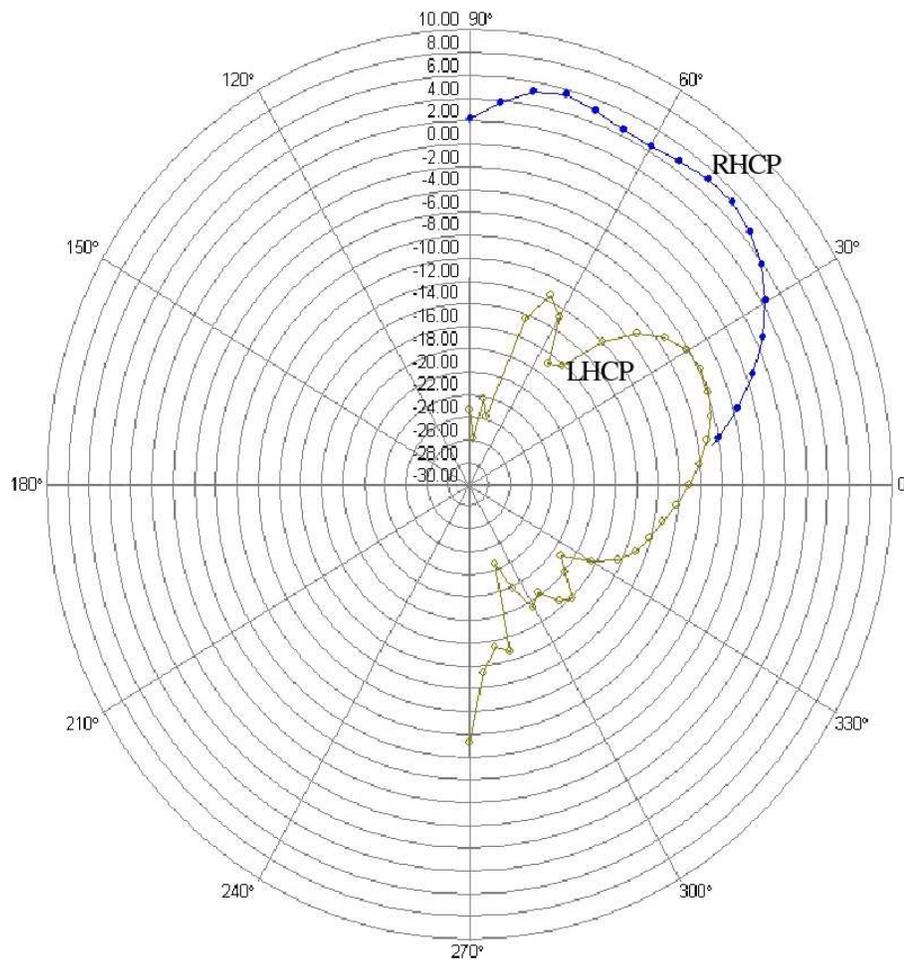


Fig. 12. RHCP vs LHCP performance of ST5-104.33. Plot has 2 dB/division.

three ST5 spacecraft are now stacked on top of each on a Pegasus support structure, and then placed inside a Pegasus XL rocket, Figure 16(b), for which the mag-boom is folded alongside the spacecraft.

On March 22, 2006 at 9:04 a.m. E.S.T., NASA's Space Technology 5 mission successfully launched from Vandenberg Air Force Base, California on a Pegasus XL rocket. At 9:27 a.m. E.S.T. initial contact with the spacecraft was made using the evolved antennas as they passed over the McMurdo Ground Station in Antarctica. This mission lasted for three months, over which time the evolved antennas performed successfully and to the mission manager's satisfaction. This evolved antenna design has become the first computer-evolved antenna to be deployed for any application and is the first computer-evolved hardware in space.

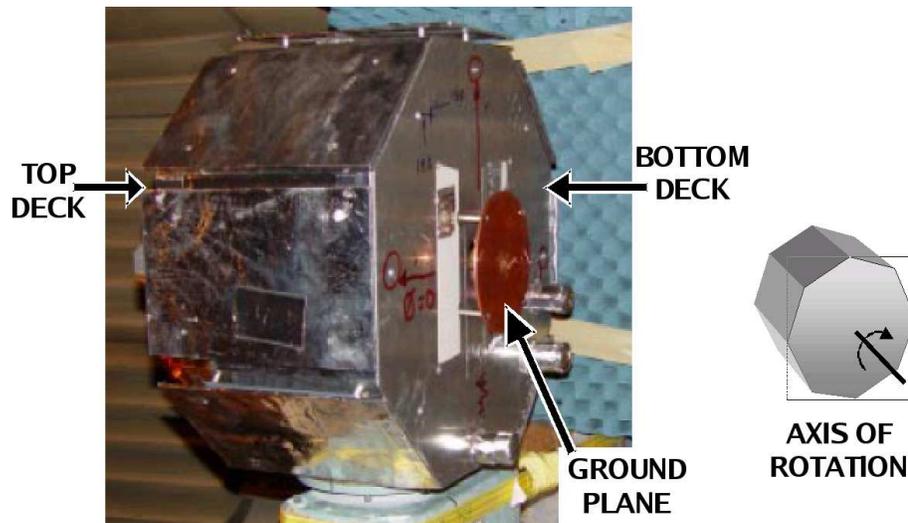


Fig. 13. Photograph of the ST5 mock-up with antennas mounted (only the antenna on the top deck is visible).

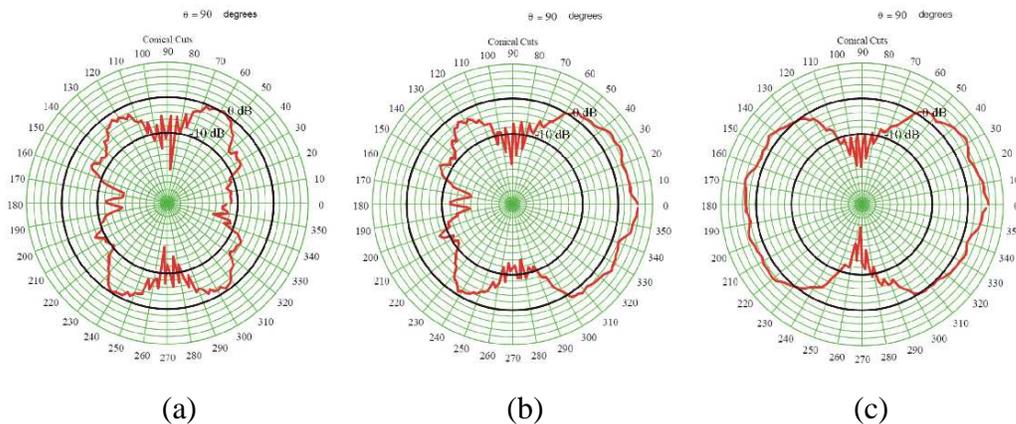


Fig. 14. Measured patterns of the two antenna setup on the ST-5 mock-up of: (left) two QHA antennas; (middle) a QHA antenna on the left side of the ST-5 mock-up with the evolved antenna ST5-33.142.7 on the right side of the ST-5 mock-up; and (left) two evolved antennas ST5-33.142.7. All three graphs are conical cuts at  $\theta = 90^\circ$ .

## 8 Conclusion


We have evolved and built four different X-band antennas, two for the initial ST5 mission requirements and two for the revised ST5 mission requirements. From an algorithmic perspective, both evolutionary algorithms produced antennas that were satisfactory to the mission planners. It took approximately 3 months to set up our evolutionary algorithms and produce the evolved antenna ST5-3-10 which was shown to be compliant with respect to the original ST5 antenna performance requirements. In response to the change in orbit, it took roughly 4 weeks to evolve



(a)



(b)

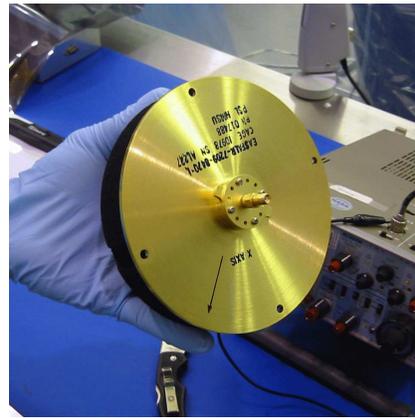


(c)

Fig. 15. Images of a completed, flight antenna: (a) different shots of the flight unit as sent to Goddard Space Flight Center; (b) a flight unit after it has been coated; and (c), the underside of a flight unit.

antenna ST5-33.142.7, which was acceptable to mission managers for the revised set of mission requirements. One ST5-33.142.7 antenna is in use on each of the three ST5 spacecraft and, with their successful launch on March 22, 2006, they have become the first computer-evolved antenna to be deployed and the first computer-evolved hardware in space.

In addition to being the first evolved hardware in space, the evolved antennas demonstrate several advantages over the conventionally designed antenna and over manual design in general. The evolutionary algorithms used were not limited to variations of previously developed antenna shapes but generated and tested thousands of completely new types of designs, many of which have unusual structures that expert antenna designers would not be likely to produce. By exploring such a wide range of designs EAs may be able to produce designs of previously unachievable performance. For example, the best antennas that were evolved achieve high gain across a wider range of elevation angles, which allows a broader range of angles over which maximum data throughput can be achieved and may require less power from the solar array and batteries. In addition, antenna ST5-33.142.7 has a

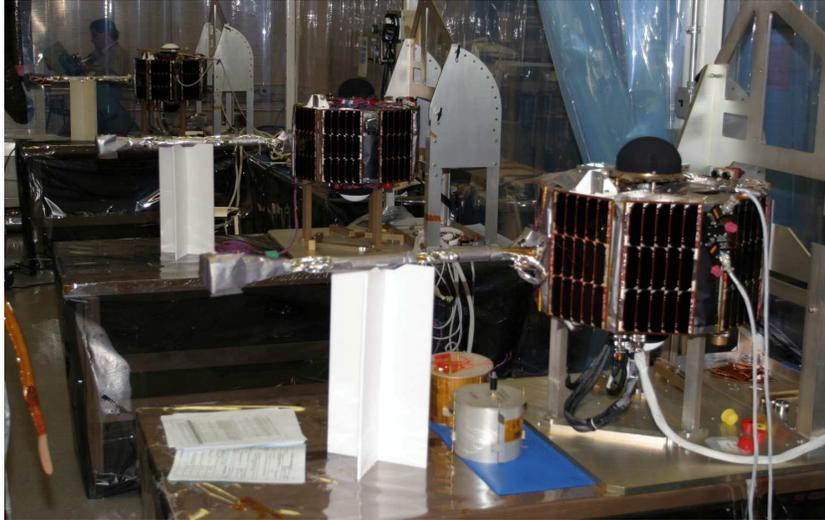

(a)



(b)

Fig. 16. Images of the ST5 spacecraft: (a) the three ST5 spacecraft with the black radomes on top containing an evolved antenna, ST5-33.142.7; and (b) the three ST5 Spacecraft mounted for launch on a Pegasus XL rocket.

very uniform pattern with small ripples in the elevations of greatest interest ( $40^\circ$  to  $80^\circ$ ) which allows for reliable performance as elevation angle relative to the ground changes. With the evolutionary design approach it took approximately 3 person-months of work to generate the initial evolved antennas versus 5 person-months for the conventionally designed antenna and when the mission orbit changed, with the evolutionary approach we were able to modify our algorithms and re-evolve new antennas specifically designed for the new orbit and prototype hardware in

4 weeks. The faster design cycles of an evolutionary approach results in less development costs and allows for an iterative “what-if” design and test approach for different scenarios. This ability to rapidly respond to changing requirements is of great use to NASA since NASA mission requirements frequently change. As computer hardware becomes increasingly more powerful and as computer modeling packages become better at simulating different design domains we expect evolutionary design systems to become more useful in a wider range of design problems and gain wider acceptance and industrial usage.

## 9 Acknowledgments

The work described in this paper was supported by Mission and Science Measurement Technology, NASA Headquarters, under its Computing, Information, and Communications Technology Program. The work was performed at the Intelligent Systems Division, NASA Ames Research Center, Linden Innovation Research, and NASA Goddard Space Flight Center. We gratefully acknowledge the support of Ken Perko of Microwave Systems Branch at NASA Goddard and Bruce Blevins of the Physical Science Laboratory at New Mexico State University.

## References

- [1] Space technology 5 mission. <http://nmp.jpl.nasa.gov/st5/>.
- [2] A. Adewuya. New methods in genetic search with real-valued chromosomes. Master’s thesis, Mech. Engr. Dept., MIT, 1996.
- [3] E. E. Altshuler. Electrically small self-resonant wire antennas optimized using a genetic algorithm. *IEEE Trans. Antennas Propagat.*, 50:297–300, March 2002.
- [4] E. E. Altshuler and D. S. Linden. Design of a loaded monopole having hemispherical coverage using a genetic algorithm. *IEEE Trans. Antennas & Propagation*, 45(1):1–4, January 1997.
- [5] E. E. Altshuler and D.S. Linden. Wire antenna designs using a genetic algorithm. *IEEE Antenna & Propagation Society Magazine*, 39:33–43, April 1997.
- [6] G. J. Burke and A. J. Poggio. Numerical electromagnetics code NEC-method of moments. Technical Report UCID18834, Lawrence Livermore Lab, Jan 1981.
- [7] R. L. Haupt. An introduction to genetic algorithms for electromagnetics. *IEEE Antennas & Propagation Mag.*, 37:7–15, April 1995.
- [8] R. L. Haupt. Genetic algorithm design of antenna arrays. In *IEEE Aerospace Applications Conf.*, volume 1, pages 103–109, Feb. 1996.

- [9] G. S. Hornby, H. Lipson, and J. B. Pollack. Evolution of generative design systems for modular physical robots. In *IEEE Intl. Conf. on Robotics and Automation*, pages 4146–4151, 2001.
- [10] G. S. Hornby, H. Lipson, and J. B. Pollack. Generative representations for the automatic design of modular physical robots. *IEEE Transactions on Robotics and Automation*, 19(4):703–719, 2003.
- [11] G.S. Hornby and J. B. Pollack. Creating high-level components with a generative representation for body-brain evolution. *Artificial Life*, 8(3):223–245, 2002.
- [12] J. Kraus and R. Marhefka. *Antennas for All Applications*. McGraw-Hill, New York, NY, 3rd edition, 2002.
- [13] D. S. Linden. *Automated Design and Optimization of Wire Antennas using Genetic Algorithms*. PhD thesis, MIT, September 1997.
- [14] D. S. Linden. Wire antennas optimized in the presence of satellite structures using genetic algorithms. In *IEEE Aerospace Conf.*, April 2000.
- [15] D. S. Linden and E. E. Altshuler. Automating wire antenna design using genetic algorithms. *Microwave Journal*, 39(3):74–86, March 1996.
- [16] D. S. Linden and R.T. MacMillan. Increasing genetic algorithm efficiency for wire antenna design using clustering. *ACES Special Journal on Genetic Algorithms*, 2000.
- [17] J. D. Lohn, W. F. Kraus, and D. S. Linden. Evolutionary optimization of a quadrifilar helical antenna. In *IEEE Antenna & Propagation Society Mtg.*, volume 3, pages 814–817, June 2002.
- [18] Z. Michalewicz. *Genetic Algorithms + Data Structures = Evolution Programs*. Springer-Verlag, New York, 1992.
- [19] E. Michielssen, J.-M. Sajer, S. Ranjithan, and R. Mittra. Design of lightweight, broadband microwave absorbers using genetic algorithms. *IEEE Trans. Microwave Theory & Techniques*, 41(6):1024–1031, June/July 1993.
- [20] Y. Rahmat-Samii and E. Michielssen, editors. *Electromagnetic Optimization by Genetic Algorithms*. Wiley, 1999.
- [21] S. Ramo, J. R. Whinnery, and T. Van Duzer. *Fields and Waves in Communication Electronics*. Wiley, 3rd edition, 1994.

## Appendix A: Genotype for Antenna ST5-3-10

Listed below is the evolved genotype of antenna ST5-3-10. The format for this tree-structured genotype consists of the operator followed by a number stating how many children this operator has, followed by square brackets which start '[' and end ']' the list of the node's children. For example the format for a node which





premature convergence.



Dr. Lohn is a Senior Research Scientist at Carnegie Mellon University. He has worked at Google, NASA Ames Research Center, Stanford University, and IBM. He received his M.S. and Ph.D. in Electrical Engineering from the University of Maryland at College Park and his B.S. in Electrical Engineering from Lehigh University. He led research in Evolvable Systems while at NASA and did early work in the new field of evolvable hardware. He co-founded and chaired a series of successful NASA/DoD evolvable hardware workshops and conferences.

His main interests lie in developing search algorithms that can automatically design and optimize hardware systems such as electromagnetic and microelectromechanical systems, robotics, and spacecraft design. Dr. Lohn is a member of the IEEE, ACM, Sigma Xi, and Phi Kappa Phi. He has over 40 technical publications and has made contributions in automated hardware design, self-replicating systems, parallel processing, and neural networks. Dr. Lohn serves as an Associate Editor of IEEE Transactions on Evolutionary Computation.



Dr. Derek Linden is the Director of Antenna Engineering at JEM-engineering and has performed groundbreaking research in the automated design of wire and patch antennas using evolutionary optimization since 1995. He is the co-inventor of the patented genetic antenna design process, and has a publication list that includes two conference keynote addresses, 29 conference, journal and magazine articles, 35 conference presentations (8 invited), five book chapters, and two IEEE short courses. Three genetic antennas which he built were launched on NASA's ST5 mission in March of 2006, becoming the first objects in space to be designed by a computer and not a human engineer. He received Discover Magazine Innovation Award (May 2000), the Gold Medal in Human Competitive Result competition at the 2004 Genetic and Evolutionary Computation Conference (GECCO), and a NASA Achievement Award in 2006. His work has also been highlighted in Science News (4 Sept 1999, p.157), The New York Times (25 Nov 1999, p.D9), Wired magazine (February 2004, p. 114), EDN (June 10, 2004), Antenna Systems and

Technology Magazine (Sept/Oct 2004), Technology Review (Feb 2005), Aviation Week (Mar 27, 2005), and Popular Science (April 2006). He graduated from the US Air Force Academy in 1991 (BS), and MIT in 1993 (MS) and 1997 (PhD).